



破碎筛分系列产品

CRUSHING AND SCREENING PLANT



Zhengzhou Kefid Mechanical Industry
Science & Technology Co., Ltd.(Headquarters)

Address: No. 169 Kexue Avenue, National HI-TECH Industrial
Development Zone, Zhengzhou, China.
Tel: 0086-371-67999255 / 67988500
Zip Code: 450001
Website: www.kefid.com
Email: sales@kefid.com

Zhengzhou Kefid Mechanical Industry
Science & Technology Co., Ltd.(Shanghai Branch)

Address: Room 802A, Building 16th, City of Elite, No.1000,
Jinhai Road, Pudong New Area, Shanghai China.
Tel: 0086-21-50471909
Zip Code: 200120
Website: www.kefidchina.com
Email: sales@kefidchina.com





» 公司简介

科菲达机械工业科技有限公司，坐落于郑州，竭诚欢迎您的光临。Kefid依托现代化规模化的生产基地，专业生产破碎筛分与磨粉设备。生产基地拥有占地逾14万平方米的车间和现代化加工设备。我们以一流的技术，过硬的产品质量和完善的售后服务体系赢得客户的信赖。Kefid将始终致力于为客户提供破碎筛分与磨粉解决方案，努力实现客户利益的最大化。

COMPANY INTRODUCTION


Kefid Mechanical Industry Science and Technology Co., Ltd, located in Zhengzhou, Henan Province, warmly welcome you to visit. Kefid owns more than 140,000 square meters modernized production bases, specialized in crushing and grinding equipment, equipped with various machine processing tools. Kefid wins good customer reputation by our superior quality, advanced technology and complete after-sales service. Kefid always committed to provide customers with tailor-made crushing, screening and grinding solutions, and always aiming for customers' benefit maximization!



认证 CERTIFICATE



CE认证
CE Certificate

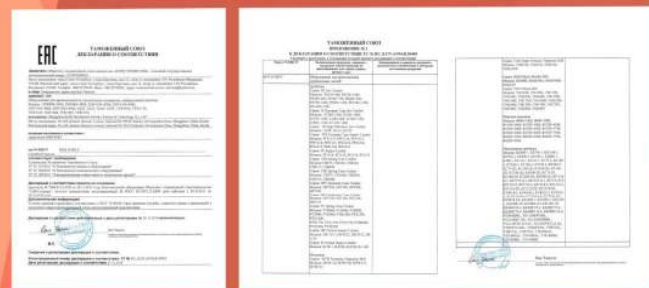

CU-TR认证
CU-TR Certificate



CU-TR认证
CU-TR Certificate



ISO认证
ISO Certificate

CONTENTS

目录



移动破碎站 Portable Crushing Plants	05
欧版颚式破碎机 European Type Jaw Crusher	07
反击式破碎机 Impact Crusher	09
欧版液压反击破碎机 European Type Impact Crusher	12
PY系列弹簧圆锥破碎机 PY Series Spring Cone Crusher	14
CS系列高效弹簧圆锥破碎机 CS Series Symons Cone Crusher	17
HPT多缸液压圆锥破碎机 HPT High Efficiency Hydraulic Cone Crusher	19
HST单缸液压圆锥破碎机 HST Single Cylinder Hydraulic Cone Crusher	23
B系列立轴冲击破碎机 B Series Vertical Shaft Impact Crusher	27
VSIS6S高效立轴冲击破碎机 VSIS6S High Efficiency Vertical Shaft Impact Crusher	31
欧式锤磨 European Type Hammer Mill	33
皮带输送机 Belt Conveyor	35
YZS系列振动筛 YZS Series Vibrating Screen	37
S5X系列振动筛 S5X Series Vibrating Screen	39
振动给料机 Vibrating Feeder	40
洗砂机 Sand Washing Machine	41
电气系统 Electric Control System	42
我们的客户 Our Customers	43
全球现场 Kefid In The World	44
我们的团队 Our Team	47
集团生产基地总览 Image Of The Manufacturing Bases	48
	49

移动破碎站 PORTABLE CRUSHING PLANTS



【产品简介】 Brief Introduction

移动破碎筛分站是我公司推出的一种新颖的岩石破碎筛分设备，分为轮胎式与履带式两大类，大大拓展了破碎筛分作业的应用范围。其设计理念与宗旨是：站在客户的立场，消除场地与环境带给客户破碎作业的障碍，为客户提供高效、低成本的移动破碎筛分设备。

The Kefid portable crushing plant is the new launched rock and mineral processing equipment. It has the wheel type and tracked type, and greatly expands the application of the crushing and screening plants. Its key design concept is to eliminate the obstacles of the crushing sites and circumstances, and offer the high efficient and low cost for the clients. To the clients, it is the best choice.



【性能特点】

Features & Benefits

一体化整机组

机组合理紧凑的设计，最大限度优化了设备在场地驻扎空间以及物料堆垛和转运空间。

机动灵活

移动破碎站车载底盘高，转弯半径小，便于在普通公路及破碎场区复杂的道路环境中行驶。为快捷的进驻工地节省了时间。

车身通用化

一种车身为10多种机型通用，根据工况，主破碎机可做到实时替换；直接为客户带来交货快捷、后续石料生产线规模品种技术升级和备选品种丰富的便利。

液压化程度高，操作简便

液压控制完成工作状态举升架设，运输折叠，等智能化延展动作，彰显高科技魅力。

可实现0基础安装

车体配置液压支腿油缸，液压支腿大行程同步升降车身底盘，自身选配快装支脚钢板，快速就位驻扎作业场地（无需基础硬化及固定），可在作业场地快速固定作业。

智能电控报警系统，安全可靠

实时监控整条生产线的设备运行状态，若出现故障，系统及时断电停机，更加有利于规范操作。

Complete System of Equipment

The compact combination design optimizes the equipment parking space, final products storage and transferring space.

Flexibility

High vehicle chassis and minimum radius of turning circle give convenience to road travel in complex site route, all for fast and quick site installation.

Trailer Versatility

Same trailer can be universal to more than a dozen of models, according to situation requests, main equipment can achieve real time exchange, which shortens our delivery time and provides convenience for client's follow-up request of capacity updating and back-up crushing plan.

More hydraulic modular applied, easy to operate

Hydraulic lifting and set-up during work status, hydraulic folding during transporting, all these smart movements show the beauty of technology.

Zero foundation installation

Trailer body is equipped with hydraulic support oil cylinder, and easy to be lifted. Optional selected fast install support steel plate, right in position quickly at the working site (no need for foundation ossify and fix), can apply to fast fix install at the working site.

Smart electric control alarm system, safe and reliable

Real time monitoring the operation status of the whole production line, any break down occurs, the system will cut off power timely, which avails standard operation.

PE颞式破碎机 PE JAW CRUSHER



【产品简介】

Brief Introduction

PE颞式破碎机是传统型初破设备，具有稳定耐用的特性，该产品规格齐全，是初破二破配置生产线的最佳选择，給料粒度可达1米，可破碎的物料强度高达350MPa。

PE jaw crusher is traditional primary type crusher, with the traits of steady and durable, provided with full specification, which should be the perfect choice for primary and secondary crushing stage in a crushing line setup, the maximum feeding size can reach 1000mm, can deal with material strength up to 350MPa maximum.

【性能特点】


Features & Benefits

- 1.性能稳定，坚实耐用；
- 2.结构简单，成本经济；
- 3.垫片调整，操作简单。

- 1.Steady performance, firm and strong;
- 2.Simple structure, cost-friendly;
- 3.Adjustable gasket, easy to operate.



Jaw Crusher Grading Curve

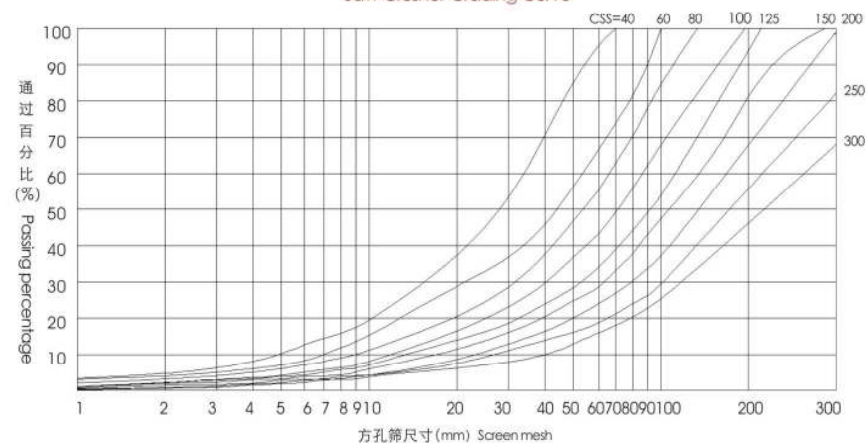

型号Model	进料口尺寸 Feed opening (mm)	最大进料尺寸 Maximum feed size(mm)	排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率 Power KW(hp)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量Weight(t)
PE250×400	250×400	200	20-50	5-20	15(20)	1430×1310×1340	2.8
PE250×1000	250×1000	210	15-60	15-50	30(40)	1550×1964×1380	6.8
PE400×600	400×600	350	40-100	15-60	30(40)	1700×1732×1653	6.5
PE500×750	500×750	425	50-100	50-100	55(75)	2035×1921×2000	10.3
PE600×900	600×900	480	65-160	60-130	75(100)	2290×2206×2370	16.5
PE750×1060	750×1060	630	80-140	100-250	110(150)	2620×2302×3110	27
PE900×1200	900×1200	750	95-165	160-380	130(175)	3789×2826×3025	54
PE1000×1200	1000×1200	850	195-265	315-550	130(175)	3889×3182×3025	57
PE1200×1500	1200×1500	1020	150-300	400-800	200(270)	4930×3148×3560	88

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.



» 欧版颚式破碎机 EUROPEAN TYPE JAW CRUSHER



【产品简介】

Brief Introduction

欧版颚式破碎机在矿山物料破碎中常用于一级或二级破碎，抗压强度不超过350MPa。欧版鄂破具有产量大、耗能低、轴承规格更大、承载能力更高、低故障率、配件耐磨性强和使用寿命更长的特点。

European type jaw crusher commonly apply to primary or secondary crushing stage during mineral crush. It can process materials with strength up to 350MPa at maximum. It has a number of advantages including larger capacity, lower energy consumption, stronger bearing, lower breakdown rate, better abrasive-resistance of spare parts and longer service life etc.



1.The movable jaw assembly adopts high-quality casting steel, to ensure the steadiness of the equipment under working condition;

2.The heavy-duty eccentric shaft is processed by high-temperature forging, heat treatment and abrasive machining, which improves the shaft strength and accuracy;

3.The integrated cast-steel bearing seat is vastly enhanced in its radial strength and is thus enabled to support a bearing of bigger capacity and higher strength;

4.European type jaw crusher adopts a symmetrical "V"-shaped cavity structure, in order for bigger and greater feeding size;

5.It is equipped with centralized lubrication system, which makes the bearing lubrication easy and quick. Its labyrinth seal can fully guarantee the proper functioning of the lubrication system to extend the life span of the bearing as a consequence;

6.The crusher uses hydraulic-driven wedges as the adjusting device which makes the adjustment easier, safer and faster.

【性能特点】

Features & Benefits



1.动颚总成采用高质量的铸钢件，保证了设备运行的稳定性；

2.重型偏心轴经过高温锻打、热处理以及磨削加工，提高了轴的强度和精度；


3.整体铸钢轴承座极大地增强了径向强度，轴承规格更大、承载能力更高；

4.欧版颚破破碎腔采用对称“V”形结构，使得进料更多更大；

5.配备集中润滑装置，使得轴承润滑方便快捷，迷宫密封充分保证润滑系统正常工作，极大延长了轴承使用寿命；

6.采用楔块调整装置，该装置更加简单、安全和快捷，而且为液压驱动调整。

反击式破碎机 IMPACT CRUSHER

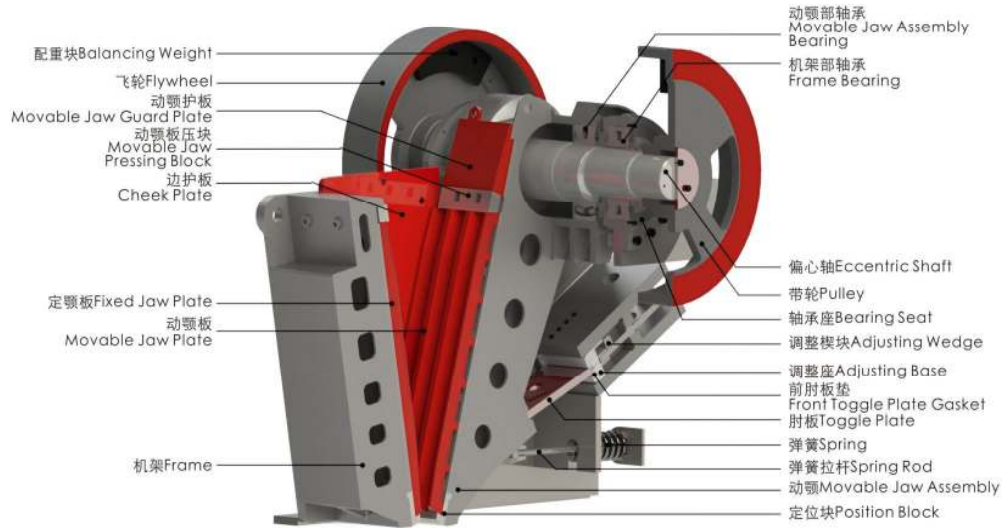

型号Model	进料口尺寸 Feed opening (mm)	最大进料尺寸 Maximum feed size(mm)	排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率 Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量Weight(t)
JC200×1300	200×1300	180	10-30	20-45	30(40)	1320×2150×1175	7.5
JC250×1000	250×1000	220	20-40	15-50	30(40)	1400×1850×1310	6.8
JC250×1200	250×1200	220	20-40	20-50	37(50)	1450×2150×1310	7.8
JC400×600	400×600	350	35-85	15-70	37(50)	1920×1460×1840	8
JC760×1100	760×1100	620	75-200	150-350	110(150)	2950×2360×2760	24
JC840×1100	840×1100	720	100-225	200-500	132(175)	3300×2320×3120	32
JC1100×1200	1100×1200	930	150-275	300-650	185(250)	4140×2660×3560	59.2

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.



【产品简介】

Brief Introduction

反击式破碎机是一种利用冲击能来破碎物料的破碎机械，使物料在高速转动的转子板锤以及反击衬板的撞击作用下达到破碎目的。加工成品呈立方体，无张力和裂缝，能破碎进料粒度不超过300mm、抗压强度不超过250MPa的各种粗、中、细物料。

Impact crusher breaks stones by the impacting energy. The stones are crushed under the function of the high-speed rotating hammer and the impact liners. The product are cubic, tension-free without cracks, it can crush all kinds of raw materials up to 300mm with the compression strength up to 250MPa.



【性能特点】

Features & Benefits

1. 进料口大、破碎腔深，适应物料块度大，加工成品呈立方体；
2. 反击板和板锤间隙能方便调节，有效控制出料粒度；
3. 转子和主轴无键连接，检修方便，经济可靠。

1. It has a large feed opening and a deep crushing chamber that can produce cubic shape material;
2. The gap between the impact liner and the blow-bars is easy to adjust so that the discharging granularity is effectively controlled;
3. The maintenance is more convenient and economical because of the keyless connection between the rotor and the shaft.

型号Model	转子尺寸 Rotor size (mm)	进料口尺寸 Feed opening (mm)	最大进料粒度 Maximum feed size (mm)	处理能力 Capacity (t/h)	功率 Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)	重量Weight(t)
PF-1010	Φ1040×1000	510×1040	200	50-90	75(100)	2455×2090×2800	12.5
PF-1210	Φ1260×1050	465×1150	250	70-130	110(150)	2582×2052×2810	15.5
PF-1214	Φ1260×1400	465×1500	300	90-180	132(175)	2582×2410×2810	18.5
PF-1315	Φ1280×1500	700×1540	300	120-250	200(270)	2930×2765×3053	24.5

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.



欧版液压反击破碎机 EUROPEAN TYPE IMPACT CRUSHER



【产品简介】

Brief Introduction

欧版反击式破碎机改良了调整装置，采用重型转子，适用于各种软、中等硬度的矿石。最大破碎抗压强度250MPa，湿度应低于10%。PFP两腔液压反击破最大破碎粒度700mm适用于粗碎和中碎。PFS三腔液压反击破在细碎和超细碎作业中表现非凡。


European Type Impact Crusher is more suitable for all kinds of soft and medium-hard rocks by improving the adjustment device and adopting the heavy-duty rotor. It can process materials with the compression strength below 250MPa and the moisture less than 10%. PFS hydraulic impact crusher with three cavities has proved excellent performance in fine crushing and extra fine crushing.

【性能特点】


Features & Benefits

- 1.整体铸钢轴承座，增强了轴承座的径向强度；
- 2.独特的板锤固定装置，更换方便快捷；
- 3.采用液压调整装置，可迅速完成排矿口大小调整，减少了停机检修时间；
- 4.液压开顶装置，可迅速完成板锤等易损件的更换；
- 5.新型耐磨材料的高铬板锤，可掉头使用，使用寿命更长。

- 1.Bearing seat adopts whole steel structure, increasing the radial bearing force;
- 2.It has unique blow bar fixture for faster and more convenient replacement;
- 3.Hydraulic adjusting device changes the discharging size faster and easier, shortening the maintenance time;
- 4.Hydraulic uplift device can accomplish a rapid replacement of the quick-wear part;
- 5.The new wear-resistant high chrome blow bar has an outstanding feature of wear-resistance. It can be turned upside down for a second use, which extends its service life.

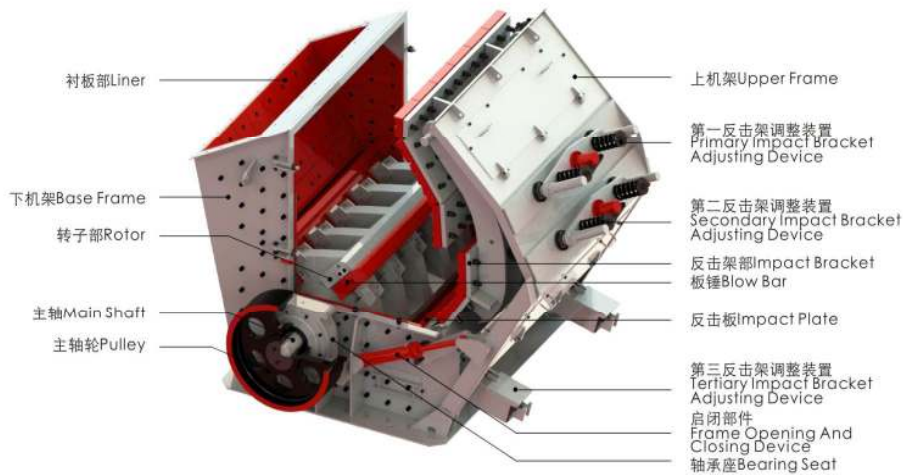

PF Impact Crusher Grading Curve

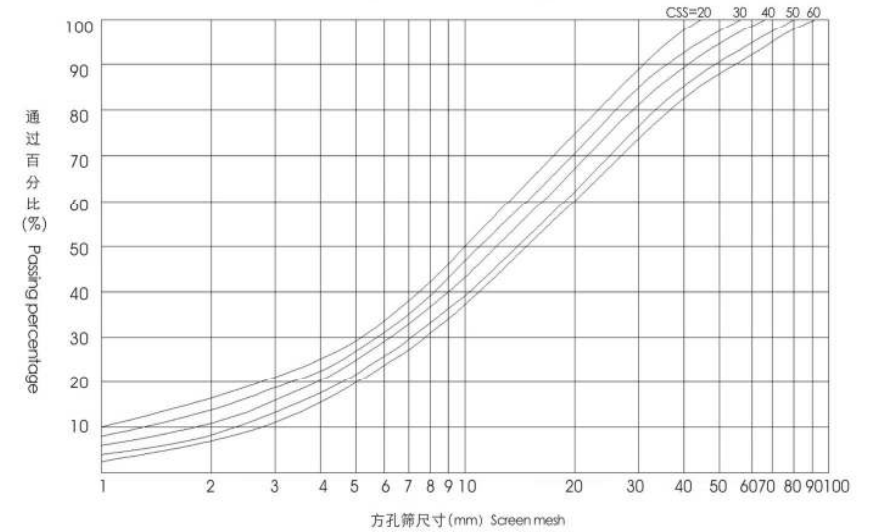

型号Model	转子尺寸 Rotor size (mm)	进料口尺寸 Feed opening (mm)	最大进料粒度 Maximum feed size (mm)	处理能力 Capacity (t/h)	功率 Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量Weight(t)
PFS1214	Φ1150×1400	570×1430	250	90-170	132(175)	2550×2310×2100	16
PFS1315	Φ1300×1500	625×1530	300	180-270	200(270)	2960×2570×2380	20
PFS1318	Φ1300×1800	625×1830	300	220-300	250(350)	2960×2870×2380	23
PFS1415	Φ1400×1500	800×1530	350	280-350	250(350)	3120×2650×2660	22.5
PFP1214	Φ1150×1400	1100×1430	500	130-200	132(175)	2400×2310×2550	18.5
PFP1315	Φ1300×1500	1200×1530	600	180-320	200(270)	2700×2570×2800	21.5
PFP1318	Φ1300×1800	1200×1830	700	240-400	250(350)	2700×2870×2800	25.5
PFP1415	Φ1400×1500	1300×1530	700	300-480	250(350)	2900×2700×3000	25

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

PY系列弹簧圆锥破

PY SERIES SPRING CONE CRUSHER




【性能特点】

Features & Benefits

1. 结构可靠，运行稳定；
2. 投资成本较低，属于经济型破碎设备；
3. 多种型号和腔型，客户选择多样。

1. Reliable structure, run steadily;
2. Lower investment, economic crushing equipment;
3. Various model and crushing cavities, customers have different choices.

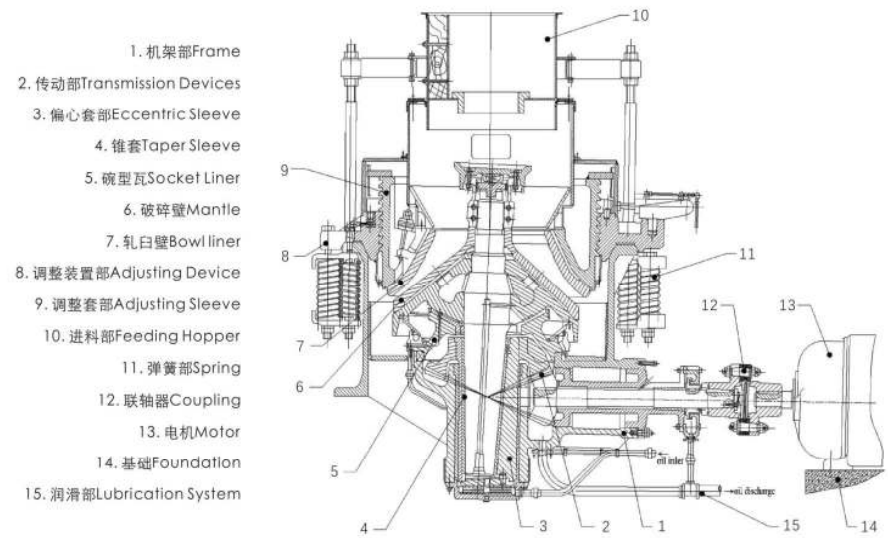

型号Model	最大进料尺寸 Maximum feed size(mm)	排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)	重量 Weight (t)
PYB	600	65	12-25	20-40	2234×1370×1675	5
PYD		35	3-15	12-23		5.5
PYB		115	15-50	50-90	2692×1640×2350	11.2
PYZ	900	60	5-20	20-65		11.2
PYD		40	3-13	15-50		11.3
PYB		145	20-50	110-168	2790×1878×2844	24.7
PYZ	1200	100	8-25	42-135		25
PYD		50	3-15	18-105		25.6
PYB		215	25-60	280-480	3910×2894×3809	50.3
PYZ	1750	185	10-30	115-320		50.3
PYD		85	5-15	75-230		50.4
PYB		300	30-60	490-800	4622×3302×4470	80
PYZ	2200	230	10-30	200-580		80
PYD		100	5-15	120-340		81.4

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

CS系列西蒙斯圆锥破

CS SERIES SYMONS CONE CRUSHER




【产品简介】

Brief Introduction

CS系列西蒙斯圆锥破主要适用于破碎中硬及以上的各种矿石与岩石，在破碎壁和轧臼壁的挤压作用下完成破碎过程。适合的物料如，铁矿石、石灰石、石英石、花岗岩、河卵石、砂岩、玄武岩、安山岩等等。

CS series Symons cone crusher is suitable for all kinds of hard and medium hard rock and ore, such as iron ore, limestone, quartzite, granite, river stone, sandstone, basalt, andesite and so on. It crushes the rock by the squeezing work between mantle and concave.

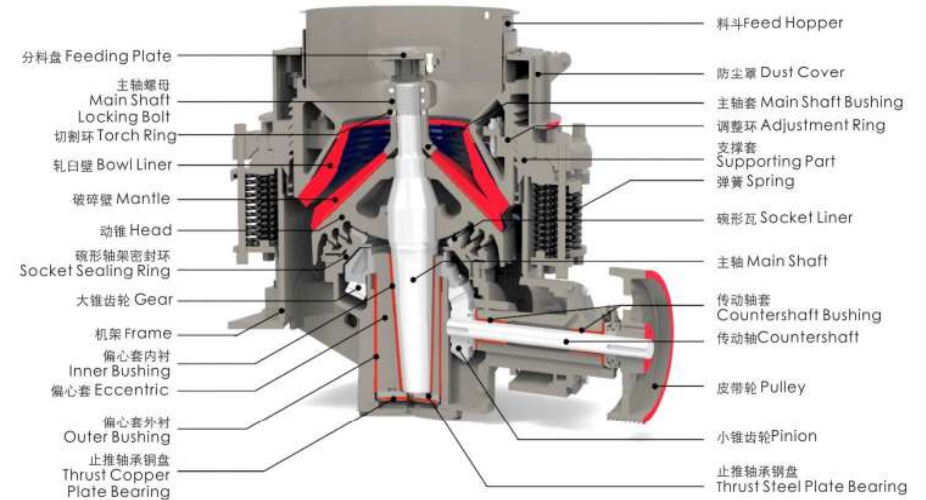

【性能特点】

Features & Benefits


1. 破碎腔型多
用户可以根据物料特性、成品细度与粒形要求，选择合适的腔型。
2. 生产效率高
优化的腔型设计，允许更多的物料进入破碎腔，同时物料通过破碎腔的速度更快，生产能力更高。
3. 过铁保护
不可破碎物料进入破碎腔时，过铁保护装置会将其释放，减少停机时间。
4. 排料口调整方便
液压推杆推动调节排料口，方便快捷。
5. 日常运行、维护简单且成本低。

1. Various crushing cavities
Customers can choose the suitable cavity according to the material features and the final product sizes.
2. High productivity
The optimized cavity allows more material into the crushing cavity one time, and the materials pass the crushing cavity at a higher speed. So the production capacity is higher.
3. Tramp iron releasing device
Once the iron comes into the crushing cavity, the tramp iron device will release it, and reduce the crusher downtime.
4. Easy adjustment of discharging opening
Hydraulic pushing rod adjusts the discharging opening conveniently and quickly.
5. Easy to operate and maintenance. Lower cost.


【粒度特性曲线】

Indicative gradation curves

中等硬度物料 CS Cone Crusher, Medium Hard Material Grading Curve

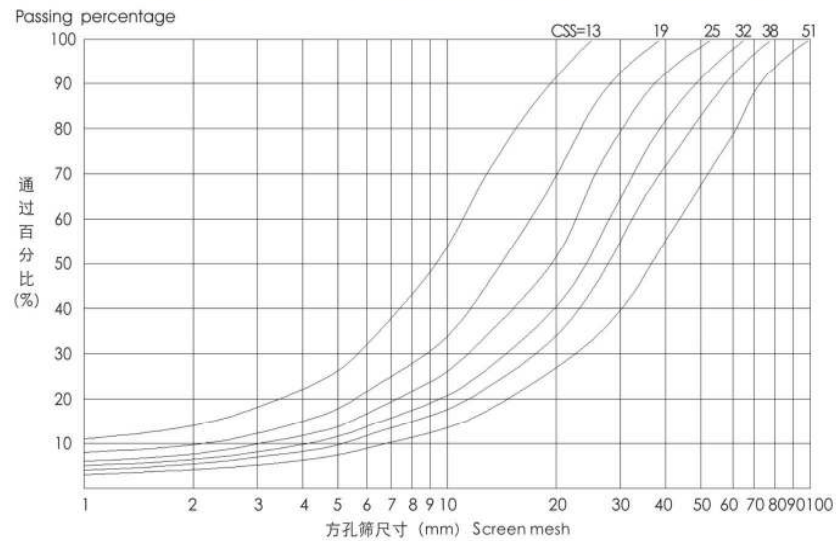

硬物料 CS Cone Crusher, Hard Material Grading Curve

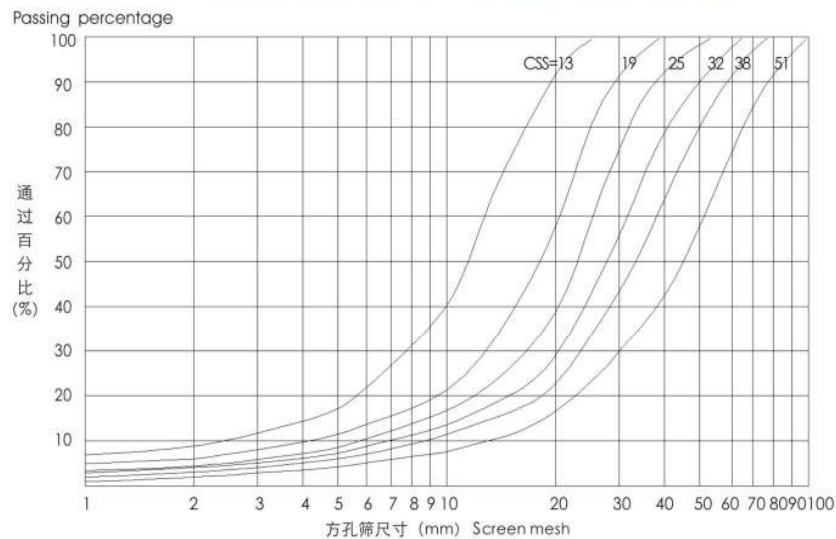

标准腔型 Standard Cavity

型号Model	动锥直径 Mantle diameter (feet)	腔型Cavity	进料口尺寸 Feed opening (mm)		排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)	重量 Weight (t)
			闭口边closed side (mm)	开口边opening side (mm)					
CSB75	900(3')	细型Fine	83	102	9-22	45-91	75(100)	2821×1880×2164	12.2
		粗型Coarse	159	175	13-38	59-163			
CSB160	1295(4¼')	细型Fine	109	137	13-31	109-181	185(250)	2800×2342×2668	23.8
		粗型Coarse	188	210	16-31	132-253			
CSB240	1650(5½')	细型Fine	216	241	19-51	172-349	240(320)	3911×2870×3771	55
		粗型Coarse	188	209	16-38	181-327			
		中型Medium	213	241	22-51	258-417			
		粗型Coarse	241	268	25-64	299-635			

短头腔型 Short Head Cavity

型号Model	动锥直径 Mantle diameter (feet)	腔型Cavity	进料口尺寸 Feed opening (mm)		排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)	重量 Weight (t)
			闭口边closed side (mm)	开口边opening side (mm)					
CSD75	914(3')	细型Fine	13	41	3-13	27-90	75(100)	2821×1880×2410	12.2
		粗型Coarse	33	60	3-16	27-100			
CSD160	1295(4¼')	细型Fine	29	64	3-16	36-163	160(220)	2800×2342×2668	23.8
		粗型Coarse	54	89	6-16	82-163			
CSD240	1676(5½')	细型Fine	70	105	10-25	109-227	240(320)	3917×2870×3771	55
		粗型Coarse	35	70	5-13	90-209			
		中型Medium	54	89	6-19	136-281			
		粗型Coarse	98	133	10-25	190-336			

技术数据如有变动,恕不另行通知。Any change of technical data shall be not advised additionally.



HPT多缸液压圆锥破 HPT HIGH EFFICIENCY HYDRAULIC CONE CRUSHER




【产品简介】


Brief Introduction

HPT系列液压多缸圆锥破碎机集机械、液压、电气、自动化等技术于一体，代表着世界最先进的破碎机技术。

HPT high efficiency hydraulic cone crusher adopts mechanical, hydraulic, electrical, and automation technologies, representing the most advanced manufacturing level in the world.

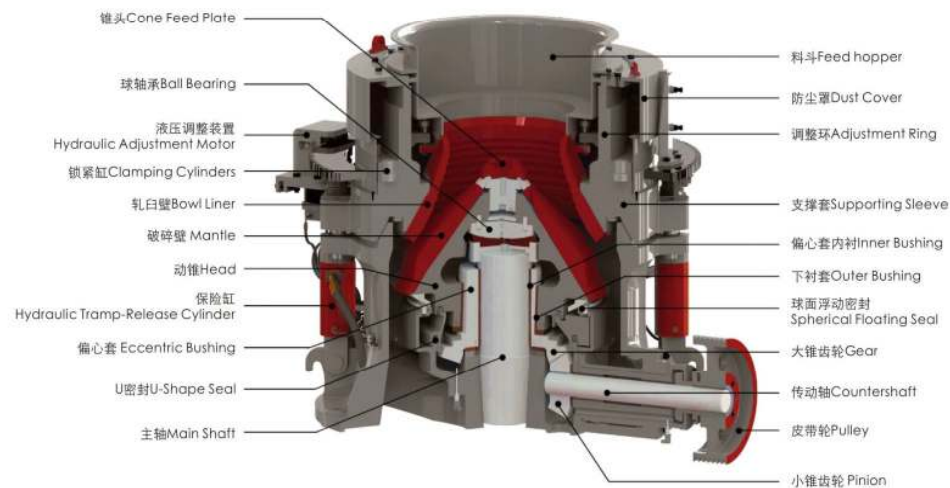

HPT High Efficiency Hydraulic Cone Crusher Grading Curve

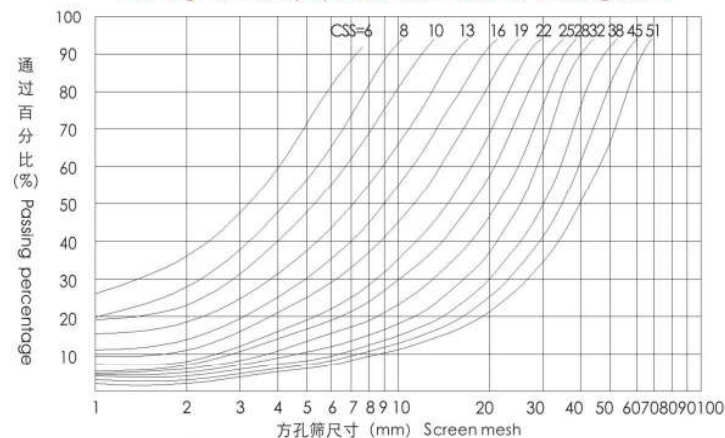

型号 Model	腔型 Cavity	闭口边进料口尺寸 Closed side feed opening (mm)	最小排料口尺寸 Min CSS (mm)	处理能力 Capacity (t/h)	功率 Power KW (HP)
HPT300	C1 (超粗) Extra Coarse	230	25	220-440	220(300)
	C2 (粗) Coarse	210	19	190-380	
	M (中) Medium	150	16	175-320	
	F1 (细) Fine	105	13	110-260	
	F2 (超细) Extra Fine	80	10	100-240	
HPT500	C1 (超粗) Extra Coarse	330	38	425-790	400(550)
	C2 (粗) Coarse	290	30	380-700	
	M (中) Medium	210	22	330-605	
	F1 (细) Fine	130	16	270-535	
	F2 (超细) Extra Fine	95	13	200-430	

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

【性能特点】

Features & Benefits

层压破碎，粒型优良

多缸液压圆锥破碎机采用粒间层压破碎原理，满腔中心喂料模式，破碎发生在物料和物料之间，扁平偏长的颗粒首先被破碎，因而产品呈立方体，针片状物料少，衬板磨损慢，钢耗低。

结构改良，省时省力

- (1) 更换衬板不需要浇筑背衬胶(环氧树脂系胶剂)，方便快捷。锥体结构加厚加强，寿命更长。
- (2) 轧臼圈固定方式更加坚固牢靠，有效避免因锰钢材料延展造成的轧臼圈松动。
- (3) 标配浮动安装底座，安装简洁，省力省时，对地基要求降低，用户投资小。

浮动密封，润滑清洁

除正压防尘装置和 U-T 型密封外，增加球面浮动密封(全接触式)，更有利于保证润滑油清洁度。该装置可提供摩擦力，在设备空转时能限制动锥自转转速，从而增加设备稳定性。减少配置平衡圈磨损，避免机架甩油，滴油现象。

Interparticle Crushing and Superior Cubic Shape

Based on the interparticle crushing principle and full central feeding mode, the crushing process occurs among particles. The flat and long particles are firstly broken, so that the product is in excellent cubic shape with less flakiness and the liners wear slowly with less steel consumption.

Improved Structure and Reduced Maintenance Cost

- (1). Epoxy resin adhesive is abandoned in liner replacement. And the thickened and strengthened cone structure extends the service life;
- (2). The bowl liner mounting is more stable, effectively avoiding bowl liner loosening caused by manganese steel extension;
- (3). The floating mounting base saves labor force and time and calls for less requirements on foundation which will benefit the user in investment.

Floating Seal and Clean Lubrication

In addition to the positive pressure dust-proof device and the U-T rubber seal, a spherical floating seal (full contact type) is added to the crusher, ensuring clean lubricating oil. It also generates friction to limit the rotation speed of mantle during empty running, thereby increasing the stability. Meanwhile, it helps to reduce the wearing of weight balance ring and avoid oil splashing and dripping.



全面检测，安全可靠

- (1) 润滑压力检测器放在设备旁，压力检测更准确可靠。
- (2) 保险缸油路采取大通径油管，大容量蓄能器，缓冲性能更好，反应更迅速，设备更安全。
- (3) 油池回油处和传动轴回油处增加温度传感器，温度检测更精确，保护更可靠。

液压调整，油液一体

- (1) 通过液压马达的正反向转动实现排矿口大小的调整，过铁保护，清腔，及设备的快速拆装等操作，自动化程度高、停机时间短。
- (2) 润滑站液压站一体化，占地面积小，维护方便。润滑油量较同规格设备减少了约 1/5。
- (3) 采用德国 AKG 风冷散热器，避免缺水滴水。大流量齿轮泵，供油稳定可靠。

智能控制，超强承载

- (1) 采用西门子品牌 PLC 和触摸屏智能控制系统，操作方便直观，数据记录齐全，保护灵敏。
- (2) 球面轴承设计更先进：承载压强小；轴承寿命长。
- (3) 机架整体铸造，强度更大。
- (4) 大部分零部件都可以从顶部或侧面拆装及维护，无须拆装机架和紧固螺栓，因而更换衬板更为快捷。

Comprehensive Detection, Safe and Reliable

- (1). Lubrication pressure detectors are placed near main equipment, whose pressure detection is accurate and reliable;
- (2). Hydraulic tramp-release cylinder adopts large-diameter oil pipe and high-capacity accumulator, which will result in better buffer performance, quicker response and more security;
- (3). Temperature sensors are added respectively at the oil return holes of the oil tank and the transmission shaft, which will keep track of the oil return temperature to make sure an accurate detection as well as a reliable protection.

Hydraulic Adjustment and Lubrication, Highly Integrated

- (1). The CSS (closed side setting) is adjusted through the clockwise and anticlockwise rotation of the hydraulic motor which greatly facilitates the tramp-release, cavity cleaning and the equipment disassembly. Clients can benefit from a shortened downtime as a consequence of the equipment automation;
- (2). The integrated hydraulic station and lubrication system save space and are easy to maintain. Compared with other crushers of the same capacity, it saves the lubricant consumption by 1/5;
- (3). German AKG air cooling system compensates for the disadvantage of water cooling system, keeping the system away from water shortage and leakage.

Intelligent Control and Super Capacity

- (1). Equipped with the Siemens PLC (Programmable Logic Controller) and intelligent control system that features a touch screen, the HPT enjoys the advantages of convenience and visualization in operation whose data recording is complete and protection reaction is sensitive;
- (2). The advanced spherical bearings design contribute to a lower pressure and a longer lifespan;
- (3). The overall casting frame enhances the frame strength;
- (4). Most parts are removable from the top or the side so there is no need to dismantle the frame or tighten the bolts, which makes the liner replacement more efficient.



HST 单缸液压圆锥破碎机

HST SINGLE CYLINDER HYDRAULIC CONE CRUSHER




【产品简介】

Brief Introduction

HST单缸液压圆锥破碎机广泛应用于矿山和骨料生产领域，可实现高效，可靠，经济和环保的生产。

HST cone crusher is widely used in mining and aggregates production fields, and can optimize your needs with high efficiency, reliability and economic performance.

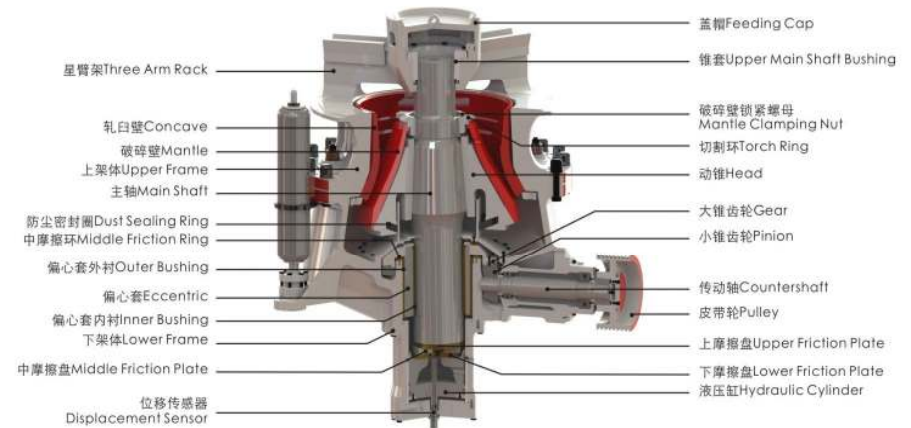

【性能特点】

Features & Benefits

同一设备，多样用途

- (1) 可通过更换破碎部件来实现二破，三破甚至四破之间的转换；
- (2) 多种破碎腔型可选。

工作稳定高效

- (1) 机器结构简单，浮动主轴，抗压强度大；
- (2) 易损件采用高耐磨材料，使用寿命延长；
- (3) 出料级配均匀，粒型好；
- (4) 密封系统优化，风冷散热；
- (5) Winner, Sun, Danfoss, MTS等国际一流品牌控制器。

操作维护安全简单

- (1) 生产过程全自动化控制；
- (2) 破碎机参数动态监测及调整；
- (3) 顶部可拆卸，便于维护保养；
- (4) 快速，方便，低成本更换衬板，无须填充胶。

安装成本优化

- (1) 底座一体化设计，安装高度低，减少钢架支撑和皮带机长度；
- (2) 可方便替换生产线中现有设备。

Versatility

- (1).Use the same crusher as a secondary or tertiary machine, simply by changing the cavity;
- (2).A wide selection of crushing chamber depending on the clients application.

High and stable performance

- (1).Robustly constructed design guarantees durability in high-power crushing process;
- (2).Higher level materials for the spare parts guarantees the longer life;
- (3).Good final product shape and grading;
- (4).Optimize the sealing system, and use the air cooling system;
- (5).Controllers like Winner, Sun, Danfoss, MTS are applied.


Easy and safe to use and maintain

- (1).Kefid crusher automation;
- (2).Dynamic setting adjustment;
- (3).Dismantling from top;
- (4).Quick, easy and cost effective liner change, no backing material.


Cost effective installation

- (1).The integration base with lower installation height reduces the steel structures and belt conveyors;
- (2).Easy to install in place of an existing crusher.

粗碎 HST-S Coarse Crushing Cavities Grading Curve

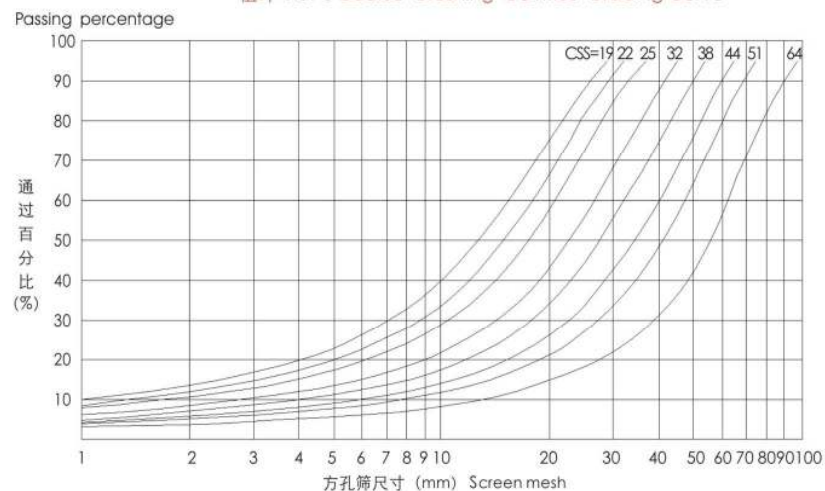

细碎 HST-H Fine Crushing Cavities Grading Curve

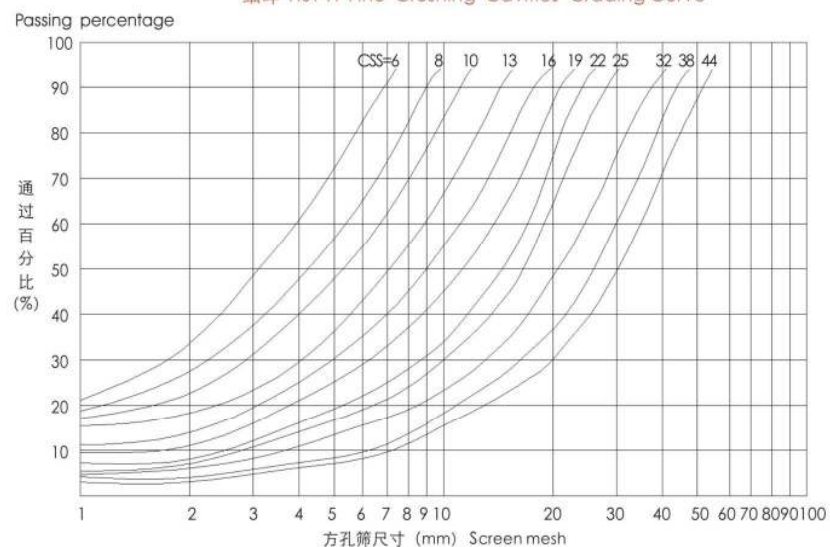

粗碎型 Coarse Crushing Cavity

型号Model	腔型Cavity	最大进料尺寸 Maximum feed size(mm)	排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率 Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量 Weight(t)
HST100	S1(超粗)Extra Coarse	240	22-38	85-170	90(125)	1535×1275×2710	9.6
	S2(中粗)Medium Coarse	200	19-32	70-130			
HST160	S1(超粗)Extra Coarse	360	25-54	120-345	132(175)	2045×1635×3040	15.5
	S2(中粗)Medium Coarse	300	22-48	105-305			
	S3(粗)Coarse	235	19-48	90-275			
HST250	S1(超粗)Extra Coarse	450	35-54	255-605	220(300)	2675×2550×3940	28
	S2(中粗)Medium Coarse	400	29-51	215-515			
	S3(粗)Coarse	300	25-51	190-490			
HST315	S1(超粗)Extra Coarse	560	41-76	335-1050	315(400)	3110×2945×4480	43.5
	S2(中粗)Medium Coarse	500	38-70	305-895			

细碎型 Fine Crushing Cavity


型号Model	腔型Cavity	最大进料尺寸 Maximum feed size(mm)	排料口调整范围 CSS min-max (mm)	处理能力 Capacity(t/h)	功率 Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量 Weight(t)
HST100	H1(细)Fine	135	10-32	45-130	90(125)	1540×1280×2300	7.5
	H2(中细)Medium Fine	65	8-19	35-80			
	H3(超细)Extra Fine	38	4-16	27-60			
HST160	H1(细)Fine	185	13-38	66-210	132(175)	2000×1550×2600	10
	H2(中细)Medium Fine	90	10-32	65-165			
	H3(超细)Extra Fine	50	6-25	48-105			
HST250	H1(细)Fine	215	16-44	110-395	220(300)	2315×1830×2940	19.5
	H2(中细)Medium Fine	110	13-38	115-340			
	H3(超细)Extra Fine	70	8-32	90-255			
HST315	H1(细)Fine	275	16-51	170-665	315(400)	2740×2200×3590	28.5
	H2(中细)Medium Fine	135	16-38	190-505			
	H3(超细)Extra Fine	65	13-22	205-320			

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.




B系列立轴冲击破

B SERIES VSI CRUSHER

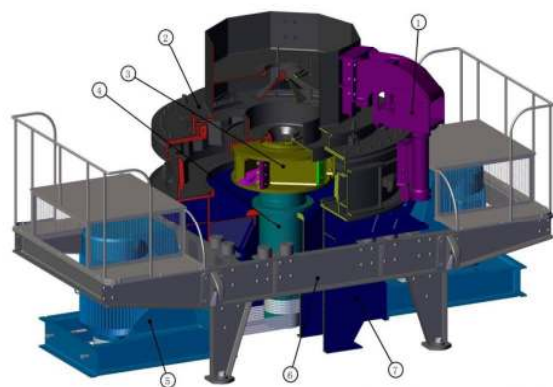

1. 顶盖回转总成
Hopper Turning Device Assembly
2. 机架上部
Upper Frame
3. 转子总成
Rotor Assembly
4. 轴承室总成
Bearing Sleeve Assembly
5. 电机传动部分
Motor
6. 支架总成
Rack
7. 排料口
Discharge Opening

VSI Crusher Grading Curve

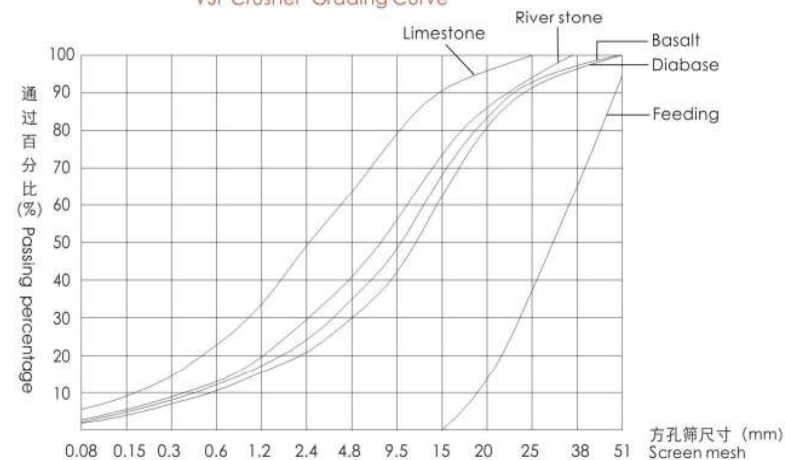

【性能特点】

Features & Benefits

1. 双泵供油润滑系统，保证主轴轴承温升低，寿命长；
2. 主轴配置高精度滚动轴承，使主轴运转更加平稳；
3. 完全中心进料和中心进料伴随落料之间的转换，适应制砂、整形等不同的客户需求；
4. 根据石打石、石打铁粉碎原理设计的粉碎腔，可对物料进行粉碎、整形。

1. Dual pump oil-supplied lubrication system guarantees the lower temperature rise and longer service life of the main shaft bearing;
2. Main shaft is equipped with high-precision rolling bearing. It makes main shaft running more stable;
3. Conversion between central feeding and central & ring feeding can adapt different customers' demands of sand making and reshaping;
4. The crushing chamber is designed according to the working principle of "crushing between stones" and "crushing between stone and liners", which is used for crushing and reshaping of the materials.

型号Model		VSI B7611	VSI B8518	VSI B9526	VSI B1140
处理能力 Capacity(t/h)	瀑落与中心进料Center and ring feeding	120-180	200-260	300-380	450-520
	全中心进料Center feeding	60-90	100-130	150-190	225-260
最大进料尺寸 Max.feeding size(mm)	软料Soft material	35	40	45	50
	硬料Hard material	30	35	40	45
主轴转速 Main shaft speed(r/min)		1700-1890	1520-1690	1360-1510	1180-1310
双电机功率 Power of double motor KW(HP)		2×55 (75)	2×90 (125)	2×132 (175)	2×200 (270)
外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)		4100×2250×2285	4140×2280×2425	4560×2450×2780	5100×2700×3300
重量 Weight (t)		10	12.5	14.5	19
液压润滑站 Hydraulic lubrication station	功率 Power KW(HP)	2×0.25(0.33)			
	安全保护Safety	无油流自动停机；风冷降温；冬季加热系统启动 Automatic stop when there is no oil; Air cooling system to reduce the heat; Start the heating system in winter.			
	油箱加热器功率 Power of oil tank heater	2KW			
	外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)	820×520×1270			

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

DR系列立轴冲击破 DR SERIES VSI CRUSHER



【产品简介】

Brief Introduction

立轴冲击破碎机是利用高速运动的物料相互自行破碎及物料与锤头、周护板之间的冲击而粉碎。可广泛应用于建筑骨料整形和人工制砂。

Vertical Shaft Impact Crusher realizes crushing by internal crushing between high-speed materials and impact between hammerhead and liners. It can be widely used in construction aggregates reshaping and artificial sand.



【性能特点】

Features & Benefits

1. 采用深腔转子，使物料通过量提高30%；
2. 周护板可上下调头使用，延长使用寿命；
3. 组合式锤头设计，可降低使用成本30%以上；
4. 两用散料盘，操作简单，实现两种进料（工作）方式方便转换。


1. Deep-chamber rotor makes the capacity increase by 30%;
2. Guard plate can prolong service life by U-turn;
3. Combined hammerhead design can reduce the operation cost by over 30%;
4. Dual-purpose distributing plate is easy to operate and can make two feeding ways convert easily.

型号Model		VSI DR7615	VSI DR8522	VSI DR9532	VSI DR1145
处理能力 Capacity(t/h)	瀑落与中心进料Center and ring feeding	150-280	240-380	350-540	500-640
	全中心进料 Center feeding	70-140	120-190	180-280	250-360
最大进料尺寸 Max.feeding size(mm)	软料Soft material	<35	<40	<45	<50
	硬料Hard material	<30	<35	<40	<45
主轴转速 Main shaft speed(r/min)		1700-1900	1500-1700	1300-1510	1100-1310
双电机功率 Power of double motor KW(HP)		2x75 (100)	2x110 (150)	2x160 (220)	2x220 (300)
外形尺寸（长×宽×高） Dimension (L×W×H) (mm)		4100×2330×2300	4140×2500×2700	4560×2600×2900	5000×2790×3320
重量 Weight (t)		9.5	12	14	18.5
液压润滑站 Hydraulic lubrication station	功率Power KW(HP)	2×0.25(0.33)			
	安全保护Safety	无油流自动停机：风冷降温；冬季加热系统启动 Automatic stop when there is no oil; Air cooling system to reduce the heat; Start the heating system in winter.			
	油箱加热器功率 Power of oil tank heater	2KW			
	外形尺寸（长×宽×高） Dimension (L×W×H) (mm)	820×520×1270			

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.




>> 6S系列高效立轴冲击破 6S SERIES HIGH EFFICIENCY VSI CRUSHER

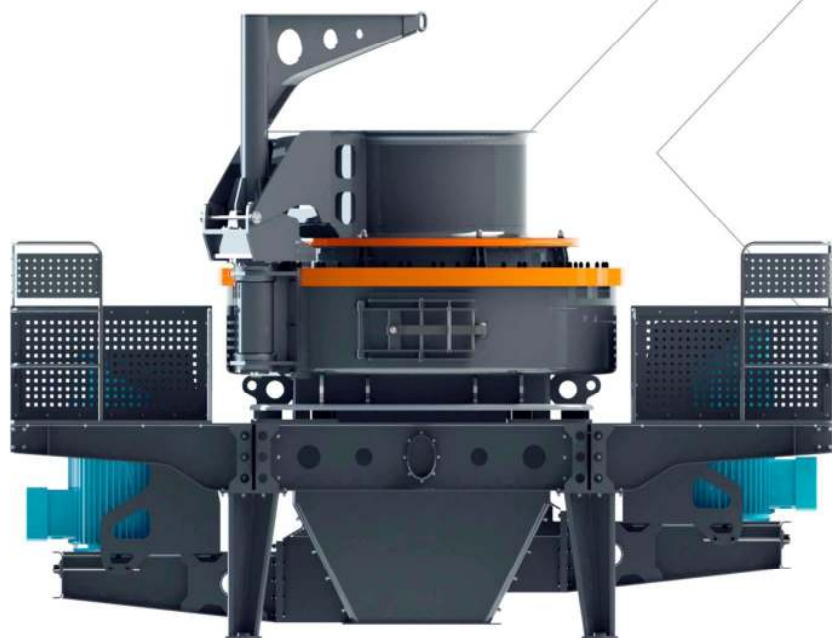

【产品简介】 Brief Introduction

VSI6S 高效立轴冲击式破碎机是基于第五代立轴冲击破的基础上，针对制砂逐步规模化，集中化，环保化，及提高设备成砂率的需求加以改进的新一代制砂、整形设备。配件采用高耐磨件，大大延长了使用寿命。

VSI6S high efficiency vertical shaft impact crusher is designed in response to the need of large-scale and centralized sand making and environmental protection as well as higher percentage sand. The technology is upgraded upon the fifth series VSI DR vertical shaft impact crusher. Its spare parts use the high abrasion proof material, greatly prolonging their service life.

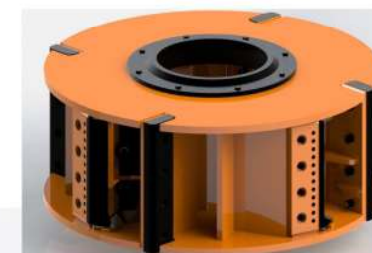

【性能特点】

Features & Benefits

1. 叶轮结构采用全新四口设计，相较于三口叶轮通过量提高约20%；
2. 对叶轮结构及工艺进行调整，延长了易损件的使用寿命；
3. 特殊密封结构防止轴承筒漏油；采用进口轴承，保证传动系统稳定运行；
4. 新增起吊装置方便客户对设备的维护；
5. 简约的机体下部结构设计，有效防止物料含水量过大导致的机体下部堵塞。

1. The impeller with four output openings increases approximate 20% of throughput capacity compared to the three output opening design;
2. The change on the structure and craft of the impeller prolongs the service life of the spare parts;
3. The special sealing structure avoids oil leaking from the bearing sleeve. We use the imported bearings to ensure the driven system operating stably;
4. The lifting appliance makes the maintenance more conveniently;
5. Design of the lower body avoids the blocking caused by the materials whose moisture are too much.

型号Model		VSI 6S1150	VSI 6S1263
处理能力 Capacity(t/h) 中心进料 Center feeding	一般破碎Crushing	344-368	454-486
	整形Shaping	413-442	545-583
最大进料尺寸 Max. feeding size(mm)	一般破碎Crushing	<45	<50
	整形Shaping	<55	<60
主轴转速 Main shaft speed(r/min)		1000-1300	900-1200
双电机功率 Power of double motor KW(HP)		2×250(340)	2×315(400)
外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)		5500×2750×3950	5700×2980×4190
重量 Weight (t)	石打石Stone-stone	17.6	20
	石打铁Stone-iron	20	23
稀油润滑站 lubrication station	流量(L/Min)Flow rate	4-16(L/Min)	
	泵电机功率 Pump Power	0.75	
	油箱加热器功率 Power of oil tank heater	4KW	
	安全保护Safety	无油流自动停机；风冷降温；冬季加热系统启动 Automatic stop when there is no oil; Air cooling system to reduce the heat; Start the heating system in winter.	

技术数据如有变动，恕不另行通知。
Any change of technical data shall be not advised additionally.

>> 欧式锤磨 EUROPEAN TYPE HAMMER MILL



【产品简介】

Brief Introduction

欧式锤磨广泛用于冶金、矿山、化工、水泥、煤矸石、建筑、制砂、耐火材料及陶瓷等工矿企业中，从事物料粉碎作业。它主要适宜粉碎抗压强度不高于320兆帕的各种软硬矿石。欧版锤磨主要由框架、转子、锤头、篦条和其他部件构成。

European type Hammer Mill is widely used in metallurgy, mining, chemical industry, cement producing, coal gangue processing, construction, sand making, fireproofing materials producing and ceramics for crushing and smashing. It is suitable for a series of soft or hard stones with compressive strength lower than 320 Mpa. The European type Hammer Mill is composed of the frame, the rotor, hammers, grizzlies and other components.

型号 Model	转子直径 Diameter of the rotor (mm)	转子长度 Length of the rotor (mm)	转子转速 Rotation speed of the rotor (r/min)	最大进料尺寸 Maximum feed size (mm)	出料粒度 Output size (mm)	处理能力 Capacity (t/h)	功率 Power KW(HP)	锤头个数 No. of the hammers (piece)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量 Weight(t)
EHM4008-75	750	800	800-1000	30	0-3	10-25	75(100)	18	2310x1665x1610	5.2
EHM4012-90	900	1200	800-1000	40	0-3	30-50	90(125)	32	2840x2100x2020	8.2
EHM4015-132	1150	1500	700-1000	50	0-3	40-75	132(175)	32	3720x2650x2540	12.5

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

>> 皮带输送机 BELT CONVEYOR

皮带宽度 Belt width	输送长度/功率 Belt length(m)/Power(kW)			输送速度 Belt Speed(m/s)	输送量Capacity(t/h)
500	≤12/3	12-20/4-5.5	20-30/5.5-7.5	1.3-1.6	45-100
650	≤12/4	12-20/5.5	20-30/7.5-11	1.3-1.6	70-120
800	≤10/4	10-15/5.5	15-25/7.5-15	1.3-1.6	120-180
1000	≤10/5.5	10-20/7.5-11	20-25/11-22	1.3-2.0	160-250
1200	≤10/7.5	10-20/11	20-25/15-30	1.3-2.0	200-400

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.



YZS系列振动筛 YZS SERIES VIBRATING SCREEN

型号 Model	筛网尺寸 Screen size (mm)	筛面层数 Layers	筛孔尺寸 Screen mesh (mm)	最大进料尺寸 Maximum feed size (mm)	振动频率 Vibrating frequency (rpm)	处理能力 Capacity (t/h)	功率Power KW (HP)	外形尺寸 (长×宽×高) Dimension (L×W×H) (mm)	重量 Weight (t)
2YZS1237	1200x3700	2	3-75	200	750-950	10-80	11(15)	4566x1892x1205	3.1
3YZS1237	1200x3700	3	3-75	200	750-950	10-80	11(15)	4728x1892x1650	3.4
2YZS1548	1500x4800	2	3-75	200	750-950	30-150	15(20)	5742x2172x1195	4.1
3YZS1548	1500x4800	3	3-75	200	750-950	30-150	15(20)	5908x2172x1650	4.8
2YZS1848	1800x4800	2	3-75	200	750-950	50-250	18.5(25)	5742x2542x1195	4.5
3YZS1848	1800x4800	3	3-75	200	750-950	50-250	18.5(25)	5908x2542x1650	5.5
4YZS1848	1800x4800	4	3-75	200	750-950	50-250	18.5(25)	6073x2542x2105	6.7
2YZS1860	1800x6000	2	3-75	200	750-950	80-280	22(30)	6962x2542x1195	5.1
3YZS1860	1800x6000	3	3-75	200	750-950	80-280	22(30)	7128x2542x1650	6.2
4YZS1860	1800x6000	4	3-75	200	750-950	80-280	22(30)	7293x2542x2105	7.3
2YZS2160	2100x6000	2	3-75	200	700-900	120-350	22(30)	7011x2980x1380	6.8
3YZS2160	2100x6000	3	3-75	200	700-900	120-350	30(40)	7157x2980x1780	8
4YZS2160	2100x6000	4	3-75	200	700-900	120-350	30(40)	7325x2980x2240	9
2YZS2460	2200x6000	2	3-75	200	700-900	150-500	30(40)	6989x3280x1320	7
3YZS2460	2200x6000	3	3-75	200	700-900	150-500	37(50)	7157x3280x1780	8.5
4YZS2460	2200x6000	4	3-75	200	700-900	150-500	37(50)	7325x3280x2240	10

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.



S5X系列振动筛 S5X SERIES VIBRATING SCREEN

【产品简介】

Brief Introduction

S5X 系列圆振筛适用于重型、中型和精细筛分等各种筛分作业，是处理初级破碎和二级破碎之后出料的理想筛分机，也可用于筛分最终成品物料。

S5X series Vibrating Screen can be applied in all kinds of screening work, from fine to medium-sized to heavy. It is the ideal sieving plant for materials after primary and secondary crushing. It is also suitable for screening the final products.



型号 Model	筛网尺寸 Screen size (mm)	筛面层数 Layers	筛孔尺寸 Screen mesh (mm)	振动频率 Vibrating frequency (t/min)	处理能力 Capacity (t/h)	功率Power KW (HP)
S5X1230-2	1200×3000	2	2-70	800-900	25-200	11(15)
S5X1545-2	1500×4500	2	2-70	800-900	45-380	11(15)
S5X1545-3	1500×4500	3	2-70	800-900	45-380	15(20)
S5X1845-2	1800×4500	2	2-70	800-900	60-450	15(20)
S5X1845-3	1800×4500	3	2-70	800-900	60-450	22(30)
S5X1860-2	1800×6000	2	2-70	800-900	75-600	15(20)
S5X1860-3	1800×6000	3	2-70	800-900	75-600	30(40)
S5X1860-4	1800×6000	4	2-70	800-900	75-600	37(50)
S5X2160-2	2100×6000	2	2-70	800-900	85-700	22(30)
S5X2160-3	2100×6000	3	2-70	800-900	85-700	30(40)
S5X2160-4	2100×6000	4	2-70	800-900	85-700	37(50)
S5X2460-2	2400×6000	2	2-70	800-900	100-800	22(30)
S5X2460-3	2400×6000	3	2-70	800-900	100-800	30(40)
S5X2460-4	2400×6000	4	2-70	800-900	100-800	37(50)
S5X2760-2	2700×6000	2	2-70	800-900	120-900	30(40)
S5X2760-3	2700×6000	3	2-70	800-900	120-900	37(50)
2YK3X2675	2600x7500	2	350	700-900	250-800	45(60)
3YK3X2675	2600x7500	3	350	700-900	250-800	45(60)
2YKN3075	3000x7500	2	350	700-900	300-1000	2x37(50)
3YKN3075	3000x7500	3	350	700-900	300-1000	2x37(50)

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

振动给料机 VIBRATING FEEDER

【产品简介】

Brief Introduction

TSW系列振动给料机可为破碎设备连续均匀地给料，并对物料进行初筛分。

TSW series vibrating feeder is for feeding materials into crushing plants evenly and pre-screening the raw materials.

【性能特点】

Features & Benefits

1. 采用4极电机，偏心轴转速高，增加了通过量；
2. ZGMn13-4脆条采用二段阶梯且安装倾角结构，提高筛分效率，结构承载能力更强；
3. 采用变频器控制，调速精准；
4. 结构简单紧凑，增加了设备运转的可靠性。

1. Using the motors of four poles with high rotation speed of eccentric shaft, the through-put capacity is increased;
2. The grizzly bars are made of ZGMn13-4. Design with two stages and special installation increases the pre-screening efficiency and the structure will be much stronger;
3. Adoption of the frequency converter makes speed adjusting much more accurately;
4. The simple and compact structure increases the operation reliability of feeder.



TSW Series



ZSW Series

【TSW系列参数表】TSW Series Parameter

型号Model	进料槽尺寸 Feed chute size (mm)	最大进料尺寸 Maximum feed size (mm)	处理能力 Capacity(t/h)	功率Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量Weight(t)
TSW0936	960×3600	500	130-280	15(20)	3680×2136×1953	3.95
TSW1139	1100×3900	600	150-350	15(20)	3980×2276×1953	4.32
TSW1345	1300×4500	700	250-450	22(30)	4580×2570×1980	4.97
TSW1548	1500×4800	850	350-650	30(40)	4880×2832×2044	6.57


技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

【ZSW系列参数表】ZSW Series Parameter


型号Model	进料槽尺寸 Feed chute size (mm)	最大进料尺寸 Maximum feed size (mm)	处理能力 Capacity(t/h)	功率Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量Weight(t)
ZSW960×3800	960×3800	500	90-160	11(15)	3880×1550×1120	3.98
ZSW1100×4200	1100×4200	600	120-240	15(20)	4300×1700×1180	4.17
ZSW1300×4900	1300×4900	600	150-400	18.5(25)	5000×1820×1220	5.2
ZSW1500×6000	1500×6000	800	460-575	30(40)	6160×2240×1440	9

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

洗砂机 SAND WASHING MACHINE

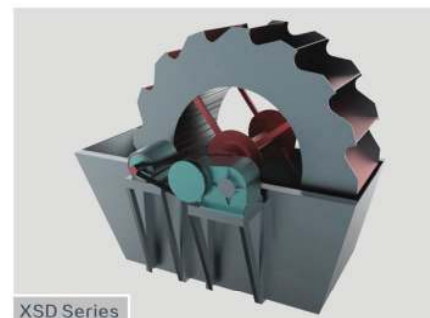

XSD Series

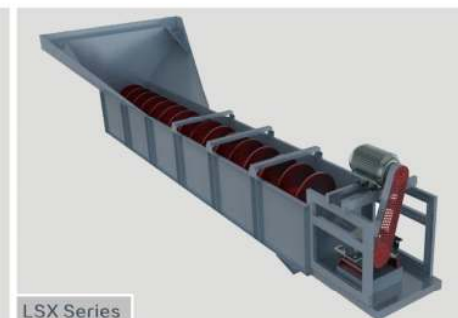

LSX Series

【产品简介】

Brief Introduction

洗砂机是配合制砂机使用的高效洗砂设备，兼具清洗、脱水的功能。

Washing machine is used for sand cleaning and dehydration, it is commonly used after the sand making machine to make the sand cleaner.

【XSD轮式洗砂机参数表】XSD Wheel Sand Washing Machine

型号Model	转轮尺寸 Wheel size (mm)	最大进料尺寸 Maximum feed size (mm)	处理能力 Capacity(t/h)	功率Power KW(HP)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量Weight(t)
XSD2610	φ2600×1000	10	20-50	5.5(7.5)	3255×1982×2690	2.6
XSD2816	φ2800×1600	10	30-60	11(15)	3540×3000×2880	4.2
XSD3016	φ3000×1600	10	50-100	15(20)	3845×3000×3080	5.5

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

【LSX螺旋洗砂机参数表】LSX Screw Sand Washing Machine

型号Model	螺旋直径 Diameter of screw (mm)	水槽长度 Length of tub (mm)	最大进料尺寸 Maximum feed size (mm)	产量 Capacity (t/h)	螺旋转速 Speed of screw (r/min)	功率Power KW(HP)	耗水量Water consumption (t/h)	外形尺寸 (长×宽×高) Dimension (L×W×H)(mm)	重量 Weight(t)
LSX-920	920	7585	10	50-100	21	11(15)	10-80	8420×2180×3960	6.2
2LSX-920	920	7585	10	100-200	21	2x11(15)	20-160	8420×3970×3961	11.5
LSX-1120	1120	9750	10	50-175	17	18.5(25)	20-150	10770×3950×4860	10.9
2LSX-1120	1120	9750	10	100-350	17	2x18.5(25)	40-300	10770×5260×4861	17.8

技术数据如有变动，恕不另行通知。Any change of technical data shall be not advised additionally.

» 电气系统 ELECTRIC CONTROL SYSTEM

【产品简介】

Brief Introduction

配套电气系统可用来查看设备运行状况、数据传输、控制整个设备现场和直接参与设备运行的各个电气设备等。

Our supporting electrical control system is used for checking the equipment operation, transporting data, controlling complete working sites and various electrical parts of equipment.

【性能特点】

Features & Benefits

1. 控制可视化、生产自动化;
2. 运行数据及时记录, 便于随时查询, 故障及早干预, 及时排除;
3. 强大通讯功能, 系统扩展性能优秀, 可实现远程物联网控制;
4. 设备运行自动化程度高, 模糊控制, 极大降低人工和材料的成本;
5. 根据生产工艺的优化, 快速完成生产线升级改造。

1. Visual controllability and automated production;
2. Timely data records, convenient for query, early intervention and troubleshooting;
3. Advanced communication function, function of system extension and remote IOT control;
4. Higher degree of automation and fuzzy control of the equipment operation can greatly reduce the labor and material costs;
5. The production line can be quickly upgrades according to the optimization of the production technology.



» 全球现场 KEFID IN THE WORLD





» 我们的客户 OUR CUSTOMERS



» 我们的团队 OUR TEAM



郑州总部基地
ZHENGZHOU HEADQUARTERS



上海机械装备工业园生产基地
SHANGHAI MACHINERY & EQUIPMENT
INDUSTRIAL PARK PRODUCTION BASE



集团破磨设备实验基地（机械研究所）
GROUP CRUSHING & GRINDING
EQUIPMENT EXPERIMENTAL BASE
(MACHINERY RESEARCH INSTITUTE)



集团生产基地总览 THE MANUFACTURING BASES

上街机械装备工业园生产基地
SHANGJIE DISTRICT MACHINERY &
EQUIPMENT INDUSTRIAL PARK
PRODUCTION BASE

